



Embassy of the United States of America

Tokyo, Japan

July 17, 2020

To: All Prospective Quoters

From: Darin A. Phaovisaid, Contracting Officer

Subject: Question and Answer (Q&A) Correspondence No. 1

Reference: Request for Quotations (RFQ) No. 19JA80-20-Q-0723
Gym Locker Room and Bathroom Restoration Services


In response to questions received in regard to the referenced Request for Quotations, the Contracting Officer is disseminating the following information.

Question 1:

Please let us know the distance from toilet chambers to the Distribution Box (DB).

Or, indicate the existing DB location on the plan drawing.

- Each electrical wiring for the future shower toilet to be connected directly to the DB.

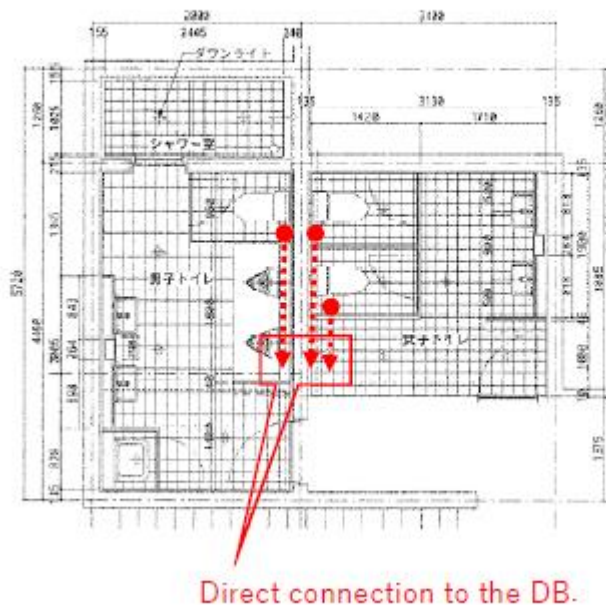

Answer 1:

The existing Distribution Box (DB) is located in the ceiling over cleaner's basin. Please use the DB as primary source. Behind a wall near female toilet's chamber, a DB is installed on a wall of

Gym Weight Room. AC100V is available.

Question 2:

The door for shower room is not to be replaced?
Repaint only?

Answer 2:

The Contractor shall re-paint the shower room door by spraying or roller with fine mohair. It is not required for replacing the door.

Question 3:

Please let us know the materials for the new ceiling.
Light Gauge Steel (LGS) + 6.0mm CSB (Calcium Silicate Board) is acceptable?
(Gapped ceiling?)

Answer 3:

The existing ceiling is a combination of Plaster Board (PB) on Light Gauge Steel (LGS) frame. The new ceiling shall be restored as the same structure as the existing ceiling.

Question 4:

Please let us know the materials for the new secondary wall.
LGS + Double layer PB (12.5mm+9.5mm) is acceptable?

Answer 4:


The existing secondary wall is combination of double layer PB (12.5mm + 9.5mm) on LGS frame. The new secondary wall shall be restored as the same structure as the existing wall.

Question 5:

h : How much ?
Or, please submit a section dwg.

h : How much ?

Or, please submit a section dwg.

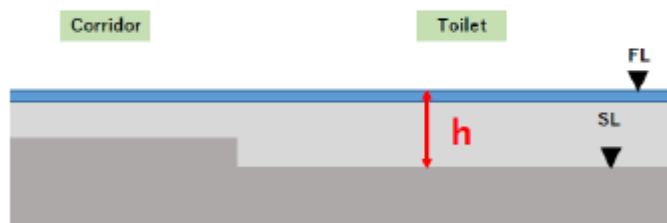

Answer 5:

A gap between floor tile surface and concrete slab is thought to be 30mm-40mm in such building build in early 80's and the bidding winner shall fine-tune by adjusting thickness of bonding agent, etc.